

SENCO[®]MAKING HARD WORK
EASIER**SCN34**

Coilnailer



Applications

Wall sheathing, Roofing sheathing, Underlayment and subflooring, Floor working, Cladding, Boarding, Other wooden assemblies


Features & Benefits

- Adjustable trigger for restrictive and dual actuation
- Comfort grip – for comfort and control
- Ultra lightweight: only 1,5 kg
- Powerful – designed to be used all day
- Toolless adjustable depth of drive
- Adjustable exhaust (toolless)
- Translucent magazine to check nail content easily
- Holds up to 400 nails

Technical specifications

Dimension (LxWxH)	260x108x302 mm
Net weight	1,55 kg
Firing mode	Selectable
Air inlet	3/8" female NPT
Operating pressure	4,8 - 8,3 bar
Air consumption (at 60 shots per minute)	43,8 l/m
Operating temperature range	-18 - 49 °C
Sound pressure level (Lpa)	83,1 dB
Sound power level (Lwa)	94,6 dB
Vibration level	3,81 m/s ²
Shots / second	4
Magazine capacity	400 pieces
Collation type 1	Wire collated
Collation type 2	Plastic collated 9mm
Collation angle	15 °

Fastener specification

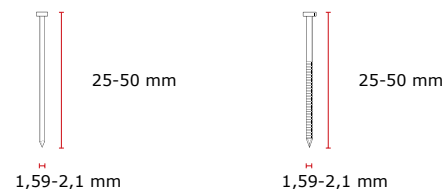

Description

SCN34, coilnailer, dual

Art. Nr.

SCN34

EAN code

8715274012261